



**Space-Trac  
Manual Carriage  
(Compact side by  
side shown)  
Directional  
carriage**

**CAPACITY IS 1250LB**


**The Space-Trac mobile carriage is constructed with low-profile extruded aluminum channel. The extruded aluminum channels house the wheels. Two wheels on each wheel assembly are standard. Wheels are a 1.575 (40mm) double sealed ball bearing and fastened with solid steel axles. All components meet S.F.M specifications.**

# SPACE-TRAC


## Manual Directional Carriages

LATERAL & PULLOUT

COMPACT (SIDE BY SIDE)

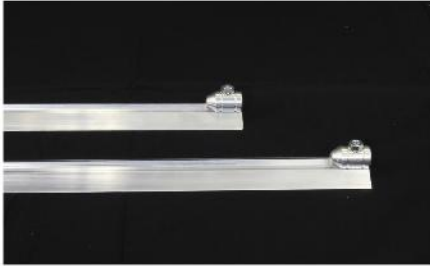

**Guidance track** is made from extruded 6061-T6 aluminum. The track is 2" wide and 7/16" tall.

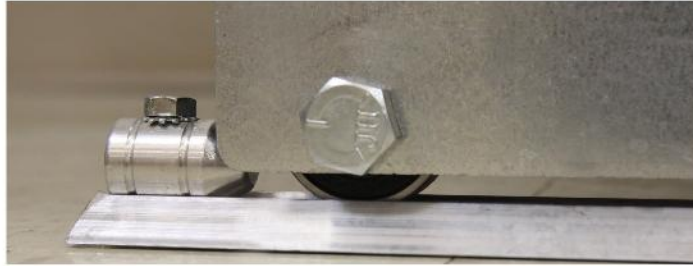

Steel carriage end stop.



Universal mounting hardware allows Space-Trac mobile carriage to mount to all wire shelving

### COLOR:

Carriage is Silver Aluminum color -Universal shelf mounting brackets are black.

### SYSTEM HEIGHT:

Space-Trac carriage Systems equal the sum of 1-3/4" for carriage and track plus height of storage units.

### GUIDANCE TRACK - INSTALLATION -ADHESIVE TAPE:

Two sided adhesive tape attached to guidance rail from factory, optional 1/4" x 1" Tapcon anchors.

**WARRANTY:** 2 year parts only.

For more information contact:



[www.space-tracsolutions.com](http://www.space-tracsolutions.com)